




Pulsante Luminoso / Illuminated Pushbutton PL-MY35

Scheda – Data sheet


Rev. 1.01

 <p style="text-align: center;">PL- MY35</p> <p>Miniatura Halo parabolico rapido, quadrato stondato 35 Parabolic Halo miniature snap-in mount, oval square 35</p> 	Caratteristiche funzionali / Functional features	
	<p>Realizzato in solido policarbonato Samsung®. Cornice: nera o cromata. Halo blu o trasparente. Attacco a baionetta brevettato: salda tenuta, rapidità e facilità di montaggio o rimozione.</p> <p>Illuminazione 12V (24V a richiesta):</p> <ul style="list-style-type: none"> - 1-Led bianco: PM-M110-2B00, PM- M111-2B00, PM-M211-2B00, PM-M217-2B00 - 5-Led bianchi: PM-M110-5B00, PM-M111-5B00, , PM-M211-5B00, PM-M217-5B00 - 4-Led bianchi: PM-M267, PM-M166 - 1-Led RGB: PM-M186 - 4-Led RGB: PM-M146, PM-M247 	<p><i>The item is made of sturdy Samsung® polycarbonate. Black or chrome bezel. Blue or clear Halo. Alberici patented Twist-on coupling provides tightness as well as fast and easy fitting or disassembling.</i></p> <p><i>12V illumination (24V upon request):</i></p> <ul style="list-style-type: none"> - 1-Led white: PM-M110-2B00, PM- M111-2B00, PM-M211-2B00, PM-M217-2B00 - 5-Led white: PM-M110-5B00, PM-M111-5B00, , PM-M211-5B00, PM-M217-5B00 - 4-Led white: PM-M267, PM-M166 - 1-Led RGB: PM-M186 - 4-Led RGB: PM-M146, PM-M247

DIMENSIONI - SIZE & CUT-OUT

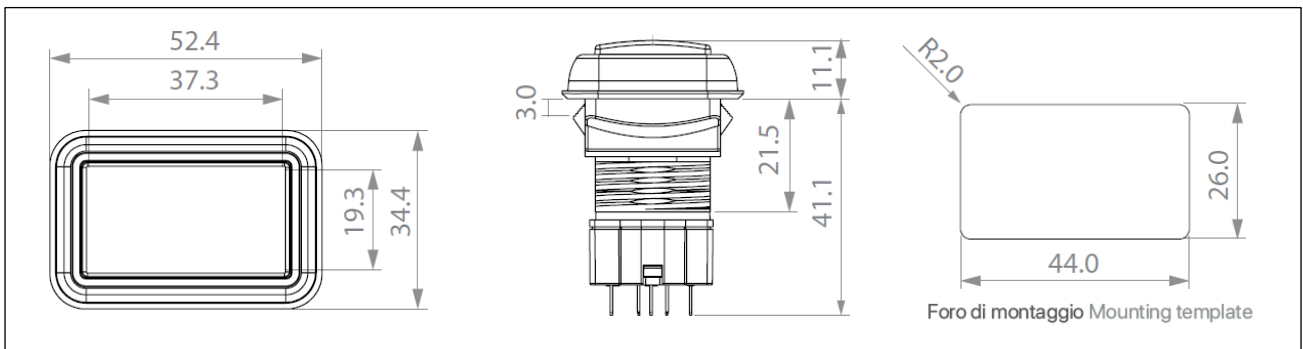

OPZIONI - OPTIONS

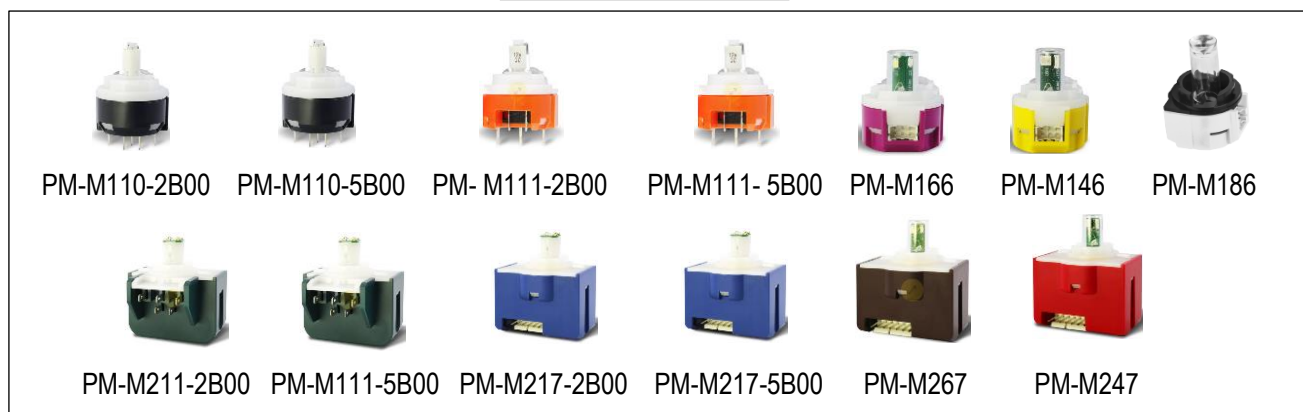

CONNETTORI - CONNECTION SOCKETS



MINI 5 PIN (fast-on 2,8mm)	IN-LINE 7 PIN	2 X 3 PIN
<p>GRIGIO / GREY ARANCIO / ORANGE VERDE / GREEN</p>	<p>1 Micro COM</p> <p>ROSSO / RED BLU / BLUE MARRONE / BROWN</p>	<p>2 X 3 PIN</p> <p>GIALLO / YELLOW FUCSIA / FUCHSIA BIANCO / WHITE</p>

Caratteristiche elettriche / Electrical specs

Mini (Cherry) microswitch	Large (Cherry) microswitch	LED Light Source	
<p>V_F: 125/250 Vca/ac</p> <p>Assorb. / Current draw: 100mA Max</p> <p>Attivazioni / Electrical life: 50.000 oper.</p>	<p>V_F: 125/250 Vca/ac</p> <p>Assorb. / Current draw: 15A Max</p> <p>Attivazioni / Electrical life: 50.000 oper.</p>	<p>V_F: 12 Vcc/dc</p> <p>Assorbimento / Current draw: 20 / 40 / 80 mA (1-LED / 5-LED / 4-RGB)</p> <p>Potenza / Power: 0.25W / 0,50W / 1W (1-LED / 5-LED / RGB)</p>	<p>$^{\circ}K$ = 6000 / 8000 (1 / 5-LED)</p> <p>Mcd = 710 / 3540 / 3.500 (1-LED / 5-LED / 4-RGB)</p> <p>Im = 5 / 25 / 34 (1-LED / 5-LED / 4-RGB)</p>

ACCESSORI PER PORTA-MICRO / ACCESSORIES FOR LAMP-SOCKETS

PORTA-MICRO GRIGIO, ARANCIO, VERDE / GREY, ORANGE, GREEN LAMP SOCKETS	PORTA-MICRO FUCSIA, GIALLO, BIANCO / VIOLET, YELLOW, WHITE LAMP SOCKETS
<p>Connettore 5p (2+3) per innesto rapido del cavo, cod. nr. P-CN2830-0000</p> <p>5p (2+3) for cable quick-plug, Part nr. P-CN2830-0000</p>	<p>Usare spina 8x5 mm, 6p (2x3) 2mm / 0,079"; per filo AWG 24-28</p> <p>Use 8x5 mm socket, 6p (2x3) 2mm / 0,079 pitch AWG Wire 24-28</p>

ACCESSORI OPZIONALI PER PORTALAMPADA ELETTRONICI (2x3pin) / PLUG FOR 2x3pin SOCKETS (OPTION)

C-020245		CONNETTORE VOLANTE FM 6P, 200JH-006HW - PLUG FM 6P, 200JH-006HW
AE-0606		FAST-ON FEMMINA PER CONN. VOLANTE FM 6P, 200JG-10KT (6 ogni C-020245) RECEPTACLE CRIMP CONTACT for PLUG FM 6P, 200JG-10KT (6 for each C-020245)
S-030160-000		CAVO 6P/6P COMPLETO di 2 connettori per PULSANTE (per schede CMS, CCS, CMG e CCG) 6P/6P CABLE with 2 plugs for PUSHBUTTON (for connection to CMS, CCS, CMG, CCG p.c. boards)

ACCESSORI OPZIONALI PER PORTALAMPADA MINI (2,8mm fast-on) / PLUG FOR 2,8mm pin SOCKETS (OPTION)

AA-1005		CONNETTORE RAPIDO PORTA-FASTON per PORTALAMPADA MINI (grigi, arancio, verde) QUICK COUPLING for MINI (A or B) LAMP HOLDER (grey, orange, green)
AE-0601		FAST-ON 2,8mm FEMMINA DRITTO PER PORTALAMPADA MINI 2,8mm FAST-ON FEMALE for MINI LAMP HOLDER



Via Ca' Bianca 421
40024 Castel San Pietro Terme
(BO) - ITALY

Progettazione e produzione di sistemi di pagamento, accessori per videogames e macchine vending
Design and manufacture of payment systems, accessories for videogames and vending machines

Tel. + 39 051 944 300

<http://www.alberici.net>

Fax. + 39 051 944 594

info@alberici.net